



Speed-Rail® Fittings for Solar Panel Mounting Options

***10 Year Corrosion Resistance Warranty**

Available from
Industrial Metal
Supply Co.

Authorized Hollaender®
Distributor

BRANCH LOCATIONS

Los Angeles

8300 San Fernando Rd.
Sun Valley, CA 91352
P: 818.729.3333
F: 818.729.3334

Inland Empire

301 Main Street
Riverside, CA 92501
P: 951.300.9900
F: 951.300.9901

Orange County




2481 Alton Parkway
Irvine, CA 92606
P: 949.250.3343
F: 949.250.4003

San Diego

7550 Ronson Road
San Diego, CA 92111
P: 858.277.8200
F: 858.277.3865

Arizona

5150 South 48th Street
Phoenix, AZ 85040
P: 602.454.1500
F: 602.454.1540

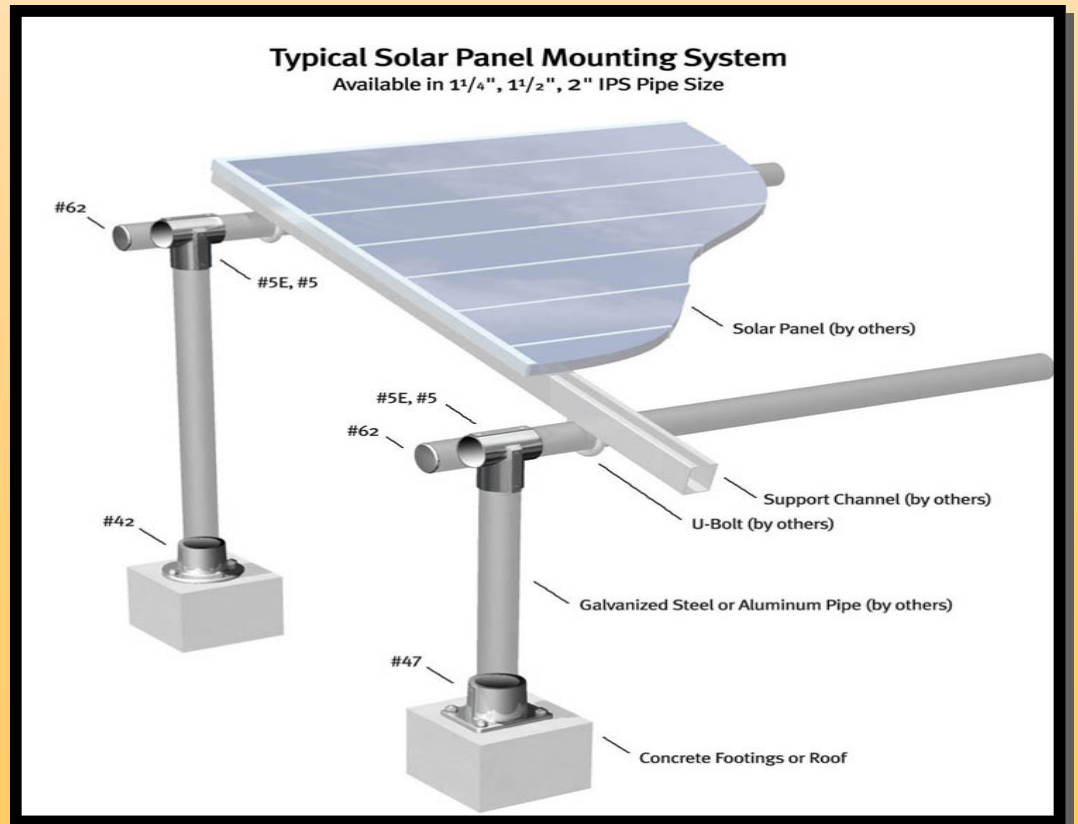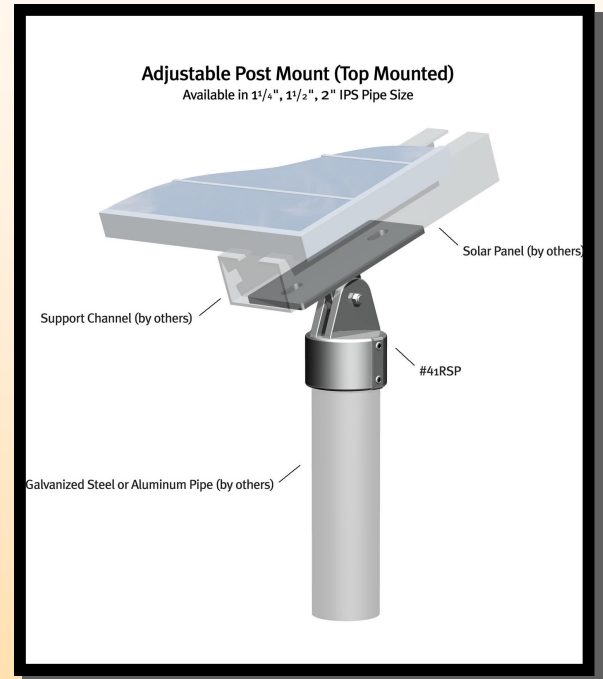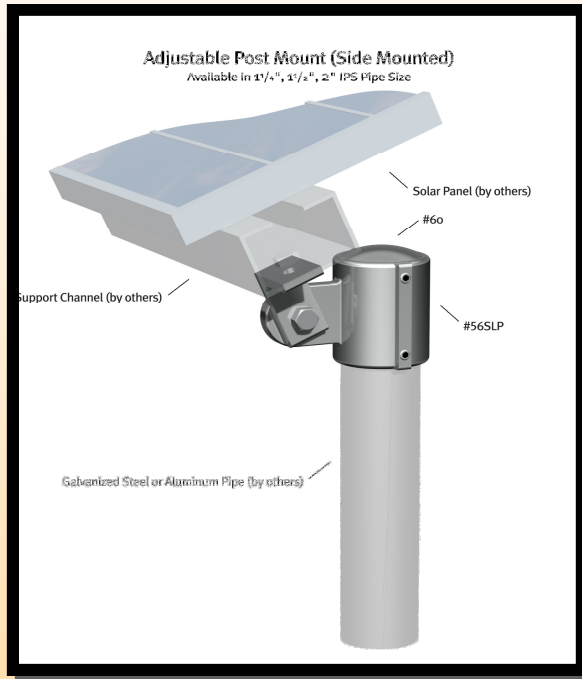



Solar Panel Mounting Options

Hollaender manufactures a large selection of structural fittings that can be used with standard pipe to create various types of solar panel mounting systems, both ground and roof.

FEATURES

Made in the USA with 100% US content

- The 535.0 aluminum-magnesium alloy used to make these fittings is the most corrosion resistant alloy available. Hollaender is supporting this fact with a 10 year warranty against corrosion on the fitting itself.
- This alloy is strong, lightweight, will not rust, and can be used with galvanized steel or other metals without concern for galvanic corrosion.

Simple installation

- No bolts, only (2) set screws to tighten with a hex key.
- Set screws have a proprietary internal/external knurled cup point that prevents loosening as long as torqued per specification.

Quick shipment

- Stock available from Hollaender Manufacturing plant in Cincinnati, Ohio, as well as from stocking distributors located across the United States.

STRUCTURAL STRENGTH

Hollaender® fittings, when torqued to the settings indicated have the following support and holding strengths when attached to galvanized steel pipe:

Fitting size	Torque (ft lb)	Holding and support force w/2 set screws	Holding and support force w/1 set screw
1 ¼" IPS	14	2000 lb	1800 lb
1 ½" IPS	17	2350 lb	1850 lb
2" IPS	17	3200 lb	1925 lb

COMMON SPEED-RAIL® FITTINGS used in SOLAR MOUNTING INSTALLATIONS

FLANGES

No. 42 Round,	No. 47 Rectangular, 4-hole 7/16"	No. 46ADJ Adj. Rectangular
1-1/4", 1-1/2"	1-1/4", 1-1/2", 2"	1-1/4", 1-1/2"

FITTINGS

No. 5E Tee (2) Set Screws	No. 5 Tee (3) Set Screws	No. 7 Cross	No. 17 Adj. Tee or Elbow	No. 19 Adj. Cross Assm.	No. 62 Plug to Fit OD of Pipe Rectangular
1-1/4", 1-1/2"	1-1/4", 1-1/2", 2"	1-1/4", 1-1/2", 2"	1-1/4", 1-1/2", 2"	1-1/4", 1-1/2", 2"	1-1/4", 1-1/2", 2"

A multitude of fittings and flanges are available –

Please go to www.hollaender.com/products to see our complete offering.

Custom modifications to our standard product can often be made to meet your specific installation requirements. Each half of our two-piece adjustable fittings (17, 19) or flanges (46ADJ) can be purchased separately. Please ask for details.

*10 year special warranty against corrosion.

Hollaender warrants that the Speed-Rail® fittings will not corrode for a period of 10 years. Natural graying or weathering of the fitting does not constitute corrosion, nor does it affect the structural integrity of the fitting. Corrosion means that red or white staining that is typical of oxidation will not appear for a period of at least 10 years.

This extended corrosion warranty does not cover fasteners or hardware. All other warranty considerations are per Hollaender's® standard warranty.

Authorized Hollaender® Distributor:



INDUSTRIAL METAL SUPPLY CO.

metal made easy

